

made in Italy

2018



protools

GARAGE EQUIPMENT



protools

INDUSTRIAL

protools



12 Month **Warranty**

The warranty of our products has a validity of 12 months from the date appearing on the purchase document.

The warranty certificate can be found in the end user manual provided along with the shipment.



Spare Parts in **24-48h**

We always have original spare parts whenever needed, available from the date of purchase and for the following 10 years. Our prompt spare parts service can reach any corner of the globe in only 24-48 hours. We also keep spare parts in our warehouse for models that have already gone beyond this time. Please check availability with our spare parts centre.

Our after-sales service can count on authorised assistance centres in many European and non European countries where highly qualified personnel, trained with us, can help you professionally and promptly.



Eco sustainability

Sustainability, a brand new way of doing business, an ethical commitment for a better environment. Producing in Italy is synonymous with processes conforming to the strictest laws in the world. We paint our products with eco friendly materials and our new painting unit is designed and made to use water-based eco friendly paint.



Quality Control

Each product made undergoes final testing and inspection with automatic devices besides the ordinary tests established by the European Standards. It is then checked once again to guarantee its perfect working order.

***pro**tools*



Symbols table

Capacity	Extensions	Min. Height	Max. Height	Pressure	Weight	Air waste	Square drive	Bolt capacity	Foldable
Double Speed	Ultimate Torque	Working Torque	Air inlet	Inner hose diameter	Air intake	Tank capacity	Revolutions per minute	Motor power	Power supply

A large, dark-colored industrial tire with a white rim is being processed in a factory. The tire is mounted on a yellow industrial machine. In the background, other industrial equipment and a forklift are visible in a large, well-lit industrial space.

A complete line of top quality garage and industrial tools.

Protools is a brand by Agapart srl, a newly established company located in the province of Reggio Emilia, Italy. The experience and the know-how acquired in this field has allowed us to create the Protools brand.

Our company's specialty is pneumatic and hydraulic jacks, air compressors, impact wrenches and pressing machines for both light and heavy vehicles. We also combine forces with several partners to provide only the best of a wide range of other garage equipments and tools, all under our brand name and warranty. An extreme attention to quality is given

to the products we offer, which are mainly manufactured in Italy. Thanks to our constant commitment, Agapart is rapidly becoming a leader in providing all-round professional services for the sectors in which it operates, with the aim of becoming one of the reference models among the players of the automotive industry.

Our after-sales service can count on authorised assistance centres in many European and non European countries where highly qualified personnel, trained with us, can help you professionally and promptly.

Automotive Jacks

Entirely manufactured in Italy, Protools range of jacks stands out for the excellent versatility and quality.

Page 8/13



Shop Service Equipment

The high performance Hydraulic Presses as well the Hydraulic Cranes and Transmission Jacks let you set up completely a full garage.

Page 21/23

Pit Jacks

A wide range of heavy duty pit jacks completes the Protools line, currently the widest and the most complete in the world.

Page 14/19



Impact Wrenches

The quality of Protools impact wrenches starts from the design phase and it is checked through a series of simulated tests carried out internally.

Page 24/25

Axle Stands

The wide selection of our axle stands allows you to work underneath the vehicle in a safer way.

Page 20



Garage Compressors

Protools presents a complete line of piston, silent and screw compressors, all of them made in Italy.

Page 26

Mining Jacks

Our range of mining jacks and heavy duty use are hydro-pneumatically operated.

Page 28/29

Atex and Industrial Impact Wrenches

Protools industrial impact wrenches together with the Atex line will become the most reliable partner in your job.

Page 30/31



Industrial Compressors

Protools presents a complete line of industrial screw compressors, motor compressor and tanks, all of them made in Italy

Page 32/33

Industrial Components

Protools industrial components will make your job easier

Page 34

Fork lift jacks



PTJ F1001



PTJ F1001

				
PTJ F1001	60 q.li	60 mm	400 mm	38 Kg
PTJ F1002	100 q.li	60 mm	400 mm	38 Kg

Hydraulic jacks



				
PTJ 15110C	1,5 t	110 mm	520 mm	40 Kg
PTJ 20110C	2 t	110 mm	580 mm	45 Kg
PTJ 25120C	2,5 t	120 mm	660 mm	56 Kg
PTJ 30120C	3 t	120 mm	560 mm	53 Kg
PTJ 40130C	4 t	130 mm	580 mm	70 Kg
PTJ 50130C	5 t	130 mm	580 mm	73 Kg
PTJ 70160C	7 t	160 mm	600 mm	90 Kg

Pneumatic jacks



							
PTJ 212	2 t	2	118 mm	308 mm	8-10 bar	14 Kg	•
PTJ 212C	2 t	2	118 mm	308 mm	8-10 bar	16 Kg	•
PTJ 312	3 t	2	118 mm	318 mm	8-10 bar	18 Kg	•
PTJ 312C	3 t	2	118 mm	318 mm	8-10 bar	18 Kg	•
PTJ 213	2 t	2	132 mm	326 mm	8-10 bar	14 Kg	
PTJ 213C	2 t	2	326 mm	326 mm	8-10 bar	16 Kg	
PTJ 220	2 t	3	205 mm	490 mm	8-10 bar	17 Kg	
PTJ 220C	2 t	3	205 mm	490 mm	8-10 bar	19 Kg	
PTJ 214	2 t	3	140 mm	360 mm	7-10 bar	20 Kg	•
PTJ 214C	2 t	3	140 mm	360 mm	7-10 bar	23 Kg	•

Air-hydraulic jacks



						
PTJ 2590C	2.5 t	88 mm	676 mm	8-10 bar	65 Kg	400 nl/min
PTJ 5090C	5 t	90 mm	500 mm	8-10 bar	75 Kg	400 nl/min

Air-hydraulic jacks



							
PTJ 30351	30 t	1	350 mm	580 mm	8-10 bar	57 Kg	400 nl/min
PTJ 40152	40/20 t	3	150 mm	300 mm	8-10 bar	39 Kg	400 nl/min
PTJ 40152L	40/20 t	3	150 mm	300 mm	8-10 bar	39 Kg	400 nl/min

Air-hydraulic jacks



							
PTJ 40172	40/20 t	2	170 mm	341 mm	8-10 bar	41 Kg	400 nl/min
PTJ 60182	60/30 t	2	180 mm	340 mm	8-10 bar	68 Kg	600 nl/min
PTJ 40212	40/20 t	2	217 mm	467 mm	8-10 bar	46 mm	400 nl/min
PTJ 60222	60/30 t	2	220 mm	450 mm	8-10 bar	71 mm	600 nl/min
PTJ 60153L	60/30/18 t	3	150 mm	335 mm	8-10 bar	46 mm	400 nl/min
PTJ 60183	60/30/18 t	3	180 mm	418 mm	8-10 bar	69 mm	600 nl/min
PTJ 70154R	70/43/23/13 t	4	150 mm	250 mm	8-10 bar	74 Kg	600 nl/min

Air-hydraulic jacks



							
PTJ 80303	80/50/25 t	3	310 mm	835 mm	8-10 bar	146 Kg	600 nl/min
PTJ 70154	70/43/23/13 t	4	150 mm	400 mm	8-10 bar	74 Kg	600 nl/min
PTJ 70184	80/50/25/15 t	4	180 mm	480 mm	8-10 bar	77 Kg	600 nl/min
PTJ 60123	60/30/15 t	3	120 mm	255 mm	8-10 bar	50 Kg	600 nl/min
PTJ 44105	44/32/22/14/8 t	5	100 mm	260 mm	8-10 bar	63 Kg	600 nl/min
PTJ 4017M	30/15 t	2	170 mm	341 mm	8-10 bar	32 Kg	400 nl/min

Jacks

Air-hydraulic jacks

PTJ40212P



PTJ20142




PTJ20142P



INCLUDES
TRANSPORT
BOX

PTJ 40152P	40/20 t	2	150 mm	300 mm	8-10 bar	35 Kg	400 nl/min
PTJ 40172P	40/20 t	2	170 mm	341 mm	8-10 bar	37 Kg	400 nl/min
PTJ 40212P	40/20 t	2	217 mm	467 mm	8-10 bar	42 Kg	400 nl/min
PTJ 20142	20/10 t	2	140 mm	306 mm	8-10 bar	17.5 Kg	400 nl/min
PTJ 20142P	20/10 t	2	140 mm	306 mm	8-10 bar	15 Kg	400 nl/min

Air-hydraulic pit jacks

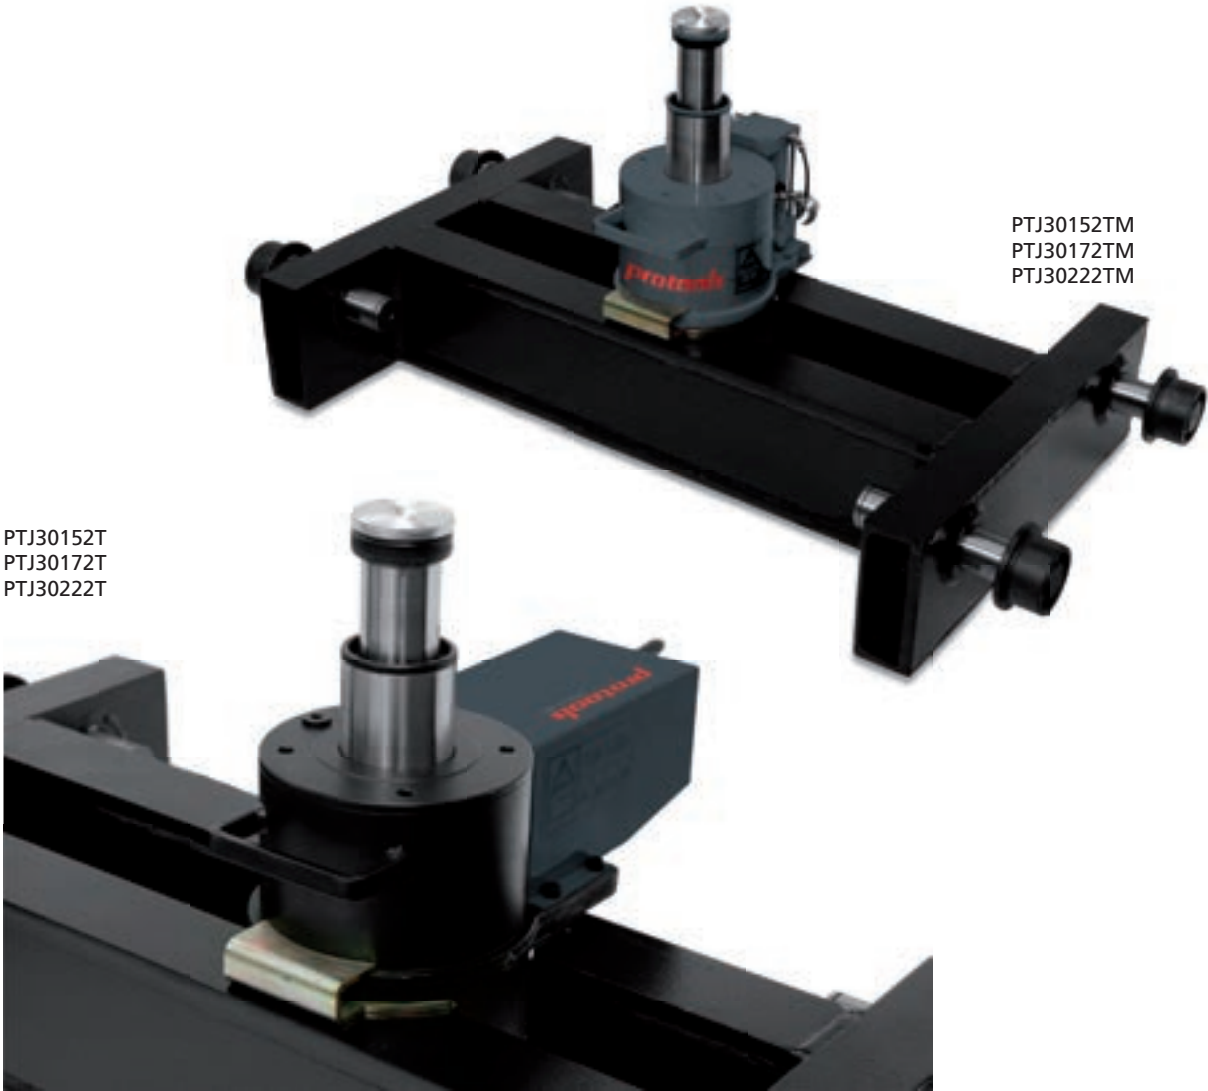

							
PTJ 30152TM	30/15 t	2	155 mm	305 mm	8-10 bar	30 Kg	400 nl/min
PTJ 30172TM	30/15 t	2	175 mm	346 mm	8-10 bar	32 Kg	400 nl/min
PTJ 30222TM	30/15 t	2	222 mm	472 mm	8-10 bar	37 Kg	400 nl/min
PTJ 30152T	30/15 t	2	155 mm	305 mm	8-10 bar	31 Kg	400 nl/min
PTJ 30172T	30/15 t	2	175 mm	346 mm	8-10 bar	33 Kg	400 nl/min
PTJ 30222T	30/15 t	2	222 mm	472 mm	8-10 bar	38 Kg	400 nl/min

Suspended air-hydraulic pit jacks



PTJ106001
PTJ156001





PTJ108001
PTJ158001







PTJ1512002

PTJ 106001	10 t	1	775 mm	1375 mm	8-10 bar	260 Kg	600 nl/min
PTJ 156001	15 t	1	775 mm	1375 mm	8-10 bar	260 Kg	600 nl/min
PTJ 206001C	20 t	1	775 mm	1375 mm	8-10 bar	260 Kg	600 nl/min
PTJ 108001	10 t	1	975 mm	1775 mm	8-10 bar	275 Kg	600 nl/min
PTJ 158001	15 t	1	975 mm	1775 mm	8-10 bar	275 Kg	600 nl/min
PTJ 208001C	20 t	1	975 mm	1775 mm	8-10 bar	275 Kg	600 nl/min
PTJ 1512002	15/5 t	2	800 mm	2000 mm	8-10 bar	280 Kg	600 nl/min





Beams

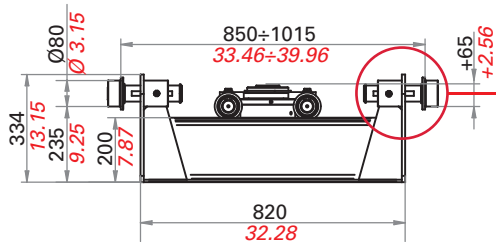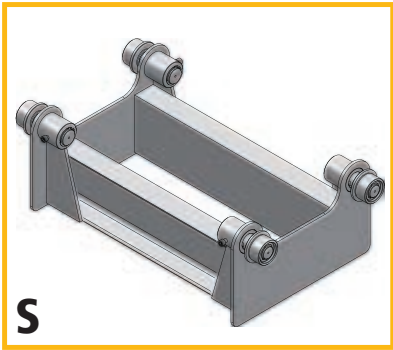

ADJUSTABLE STANDARD WHEELS

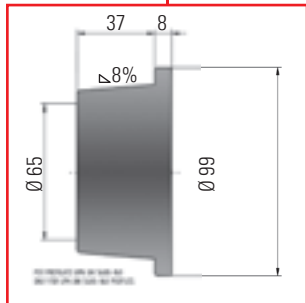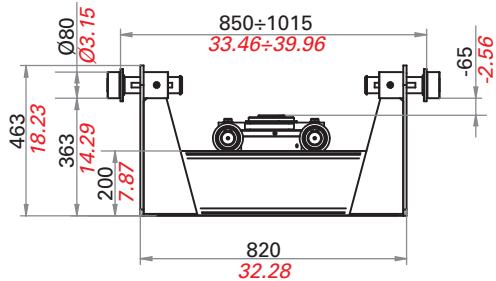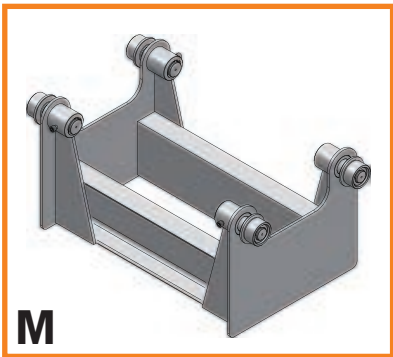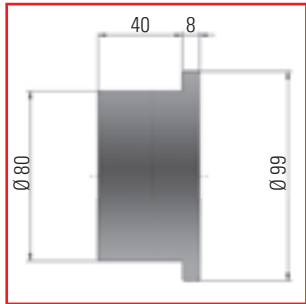

CONICAL WHEELS ON DEMAND

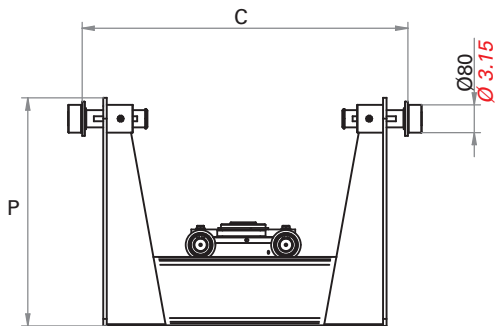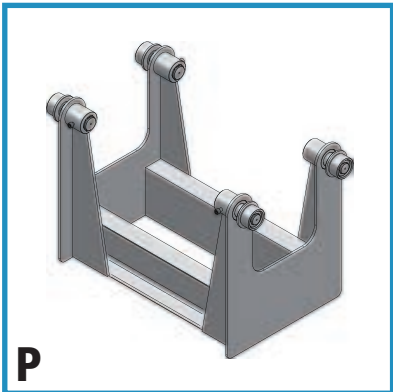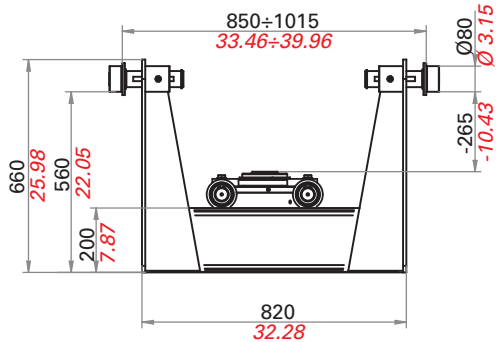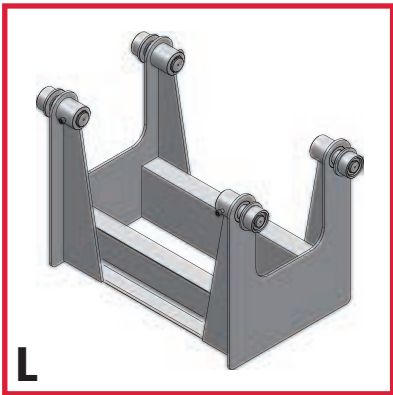

Power Units




TOP version

- 1_Quick approach
- 2_Lifting
- 3_Quick descent
- 4_Adjusting motor speed/lifting
- 5_Motor speed/lifting selector
- 6_Fine jack drop adjustment



EASY version

- 1_Quick approach
- 2_Lifting
- 3_Quick descent

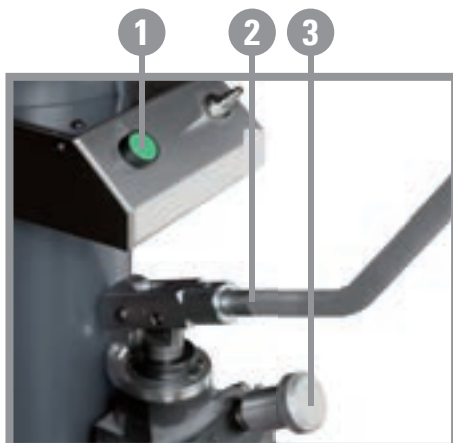


MANUAL version

- 1_Quick approach
- 2_Lifting
- 3_Descent

Air hydraulic pit **jacks**

TOP version

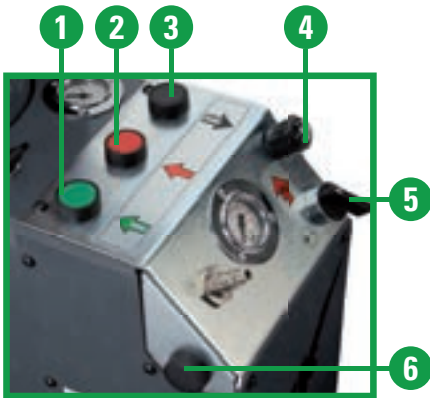

- 1. Quick approach
- 2. Lifting
- 3. Quick descent
- 4. Adjusting motor speed/lifting
- 5. Motor speed/lifting selector
- 6. Fine jack drop adjustment

EASY version



- 1. Quick approach
- 2. Lifting
- 3. Quick descent

PNEUMATIC version



Air driven wheels: **1200 kg** capacity

SPRING version




Wheels with spring: **600 kg** capacity

PTJ108002
PTJ158002



PTJ 108002	20/10 t	2	800 mm	1985 mm	8-10 bar	250 Kg	600 nl/min
PTJ 158002	30/15 t	2	800 mm	1985 mm	8-10 bar	250 Kg	600 nl/min


Transmission jacks

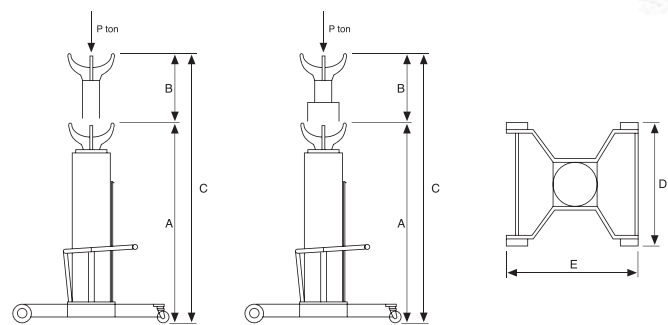

			A	B	C	D	E
PTT P25	250 kg	22 kg	1150	850	2000	350	500
PTT P50	500 kg	33 kg	1150	850	2000	370	500
PTT P100	1000 kg	40 kg	1200	850	2050	490	580
PTT P150	1500 kg	60 kg	1200	850	2050	490	580

Accessories

Jacks Accessories

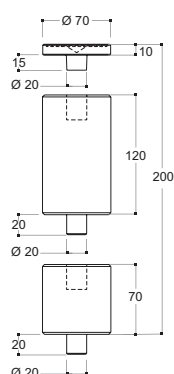


A02354

A02406

A02410


Cod.	Max Capacity	Application
A02354	80 t.	Prolunghe - Extensions
A02410	80 t.	Prolunghe - Extensions
A02406	80 t.	Prolunghe - Extensions



A02376


A02453

Cod.	Max Capacity	Application
A02376	20 t.	Prolunghe - Extensions
A02453	20 t.	Prolunghe - Extensions




A02430

Cod.	Max Capacity	Application
A02430	5 t.	Solo per YAK 109/C
		Only for YAK 109/C




A02429



A02428

Cod.	Max Capacity	Application
A02429	2 t.	Solo per YAK 132 - 132/C - 203 - 203/C
		Only for YAK 132 - 132/C - 2003 - 203/C
A02428	2 t.	Solo per YAK 132 - 132/C - 203 - 203/C
		Only for YAK 132 - 132/C - 2003 - 203/C

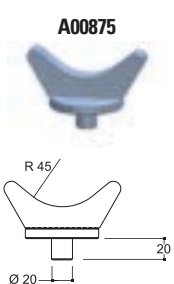

A00875



A04270




A04276

Cod.	Max Capacity	Application
A00875	80 t.	Mezzi con assale tondo
		Truck with round axles
A04270	80 t.	Mezzi con assale tondo
		Truck with round axles
A04276	80 t.	Mezzi con assale tondo
		Truck with round axles


Accessories

Jacks Accessories

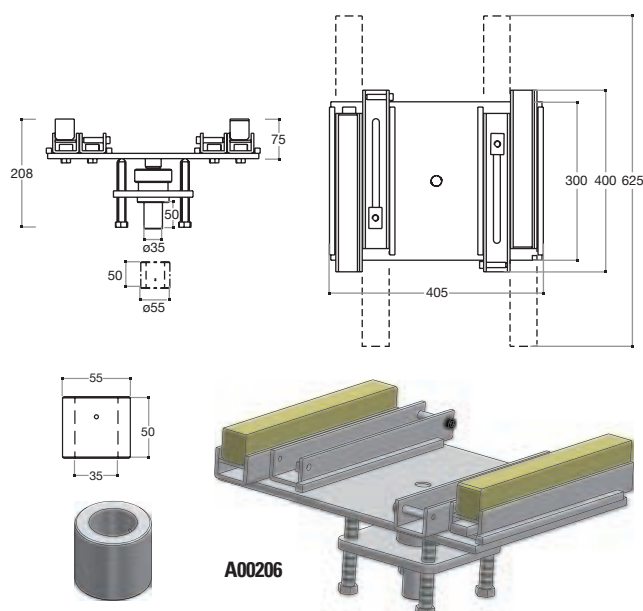


A00206

Cod.	Application
A00206	Piatto snodabile con funi (con relativo adattatore diametro 55mm) Utilizzo: rimozione e manutenzione trasmissioni, cambi, differenziali
	Adjustable plate with ropes (with 55 mm diameter adapter) Use: removal and maintenance of transmissions, gears, differentials.

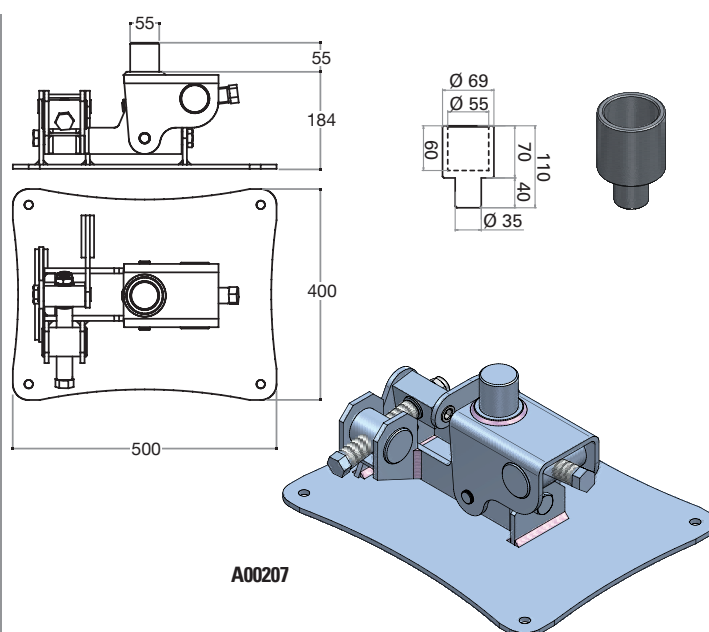


A00207

Cod.	Application
A00207	Piatto snodabile con catene Portata: 1.5 t Utilizzo: rimozione e manutenzione trasmissioni, cambi, differenziali
	Adjustable plate with chains Capacity: 1.5t Use: removal and maintenance of transmissions, gears, differentials

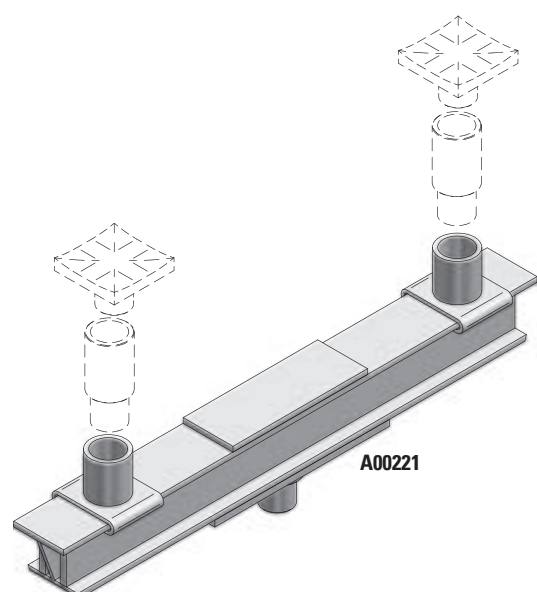

A00221

Cod.	Application
A00221	Traversa 15 t. Utilizzo: sollevamento a 2 punti
	Jacking beam 15 t. Use: 2-point lifting

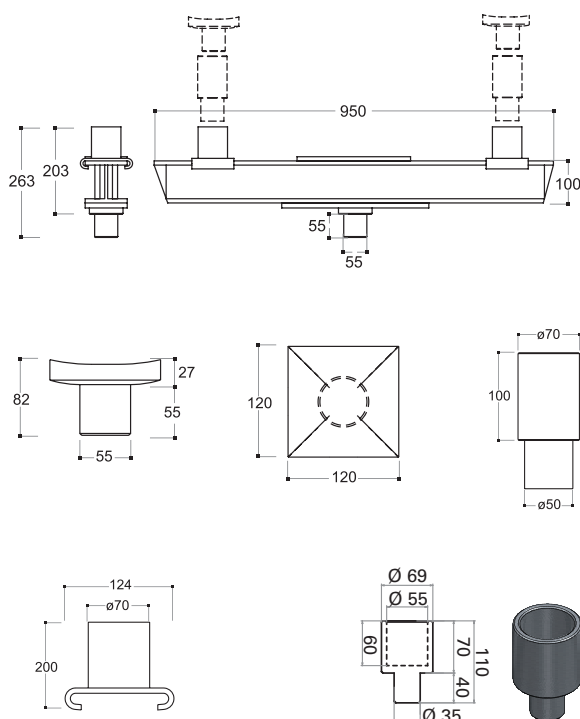

Axle Stands



				
PTJ 05048	5 t	310 mm	480 mm	7 kg
PTJ 05073	5 t	445 mm	730 mm	9.5 kg
PTJ 05120	5 t	695 mm	1200 mm	16 kg
PTJ 10048	10 t	310 mm	480 mm	10 kg
PTJ 10073	10 t	445 mm	730 mm	13.5 kg
PTJ 10120	10 t	695 mm	1200 mm	21.5 kg
PTJ 15048	15 t	310 mm	480 mm	13 kg
PTJ 15073	15 t	445 mm	730 mm	17.5 kg
PTJ 15120	15 t	695 mm	1200 mm	27.5 kg
PTJ 20048	20 t	310 mm	480 mm	13.5 kg
PTJ 20073	20 t	445 mm	730 mm	18.5 kg
PTJ 20120	20 t	695 mm	1200 mm	30 kg

Cranes

Hydraulic Cranes



PTCM5



PTCM10S



PTCM20D

			
PTC M5	500 kg	77 kg	
PTC M10	1 t	95 kg	
PTC M10D	1 t	95 kg	
PTC M20D	2 t	211 kg	
PTC M5S	500 kg	83 kg	•
PTC M10S	1 t	99 kg	•

Presses

Hand Pump



PTPW20



PTPW30



PTPW10



PTPW50

			
PTP W10	10t	100 kg	•
PTP W20	20 t	130 kg	•
PTP W30	30 t	230 kg	•
PTP W50	50 t	350 kg	•
PTP W100	100 t	1050 kg	•

Presses

Motor Driven



PTPEH100



PTPEH50

			
PTP EH50	50t	420 kg	•
PTP EH100	100 t	1000 kg	•
PTP EH150	150 t	1700 kg	•

Impact Wrenches

Light Duty Line



PTW1050



PTW44JA2



PTW46TA2



PTW64TA2



PTW46TB1



PTW217

							
PTW 1050	1/2"	M10-M16	700 Nm	6.3 bar	1/4" NPT	9.5 mm	1.3 Kg
PTW 217	3/4"	M14-M24	1600 Nm	6.3 bar	1/2" BSP	13 mm	5.95 Kg
PTW 44JA2	1/2"	M10-M16	746 Nm	6.3 bar	1/4" NPT	9.5 mm	1.2 Kg
PTW 46TA2	1/2"	M10-M16	1085 Nm	6.3 bar	1/4" NPT	9.5 mm	2.0 Kg
PTW 46TB1	1/2"	M10-M16	1130 Nm	6.3 bar	1/4" NPT	9.5 mm	2.0 Kg
PTW 64TA2	3/4"	M14-M24	1898 Nm	6.3 bar	1/2" BSP	13 mm	3.3 Kg

Compressors

Belt driven Air compressors

ADDITIONAL CONFIGURATIONS
AVAILABLE ON DEMAND



PTC17E-200-330-CAR-T




PTC9-50-CAR-M



PTC35-500-600-CAR-T
PTC38-500-650-CAR-T

							
PTC 9-24-CAR-M	240 l/min	24 liters	2850 min-1	2 HP	8 bar	230 V - 50 Hz	25 kg
PTC 9-50-CAR-M	240 l/min	50 liters	2850 min-1	2 HP	8 bar	230 V - 50 Hz	36 kg
PTC 12E-100-250-CAR-M	250 l/min	100 liters	1250/min	2 HP	10 bar	230 V - 50 Hz	62 kg
PTC 17E-150-320-CAR-M	320 l/min	150 liters	1500/min	2 HP	10 bar	230 V - 50 Hz	78 kg
PTC 17E-200-330-CAR-T	330 l/min	200 liters	1550/min	3 HP	10 bar	230 V - 50 Hz	88 kg
PTC 25-270-500-CAR-T	500 l/min	270 liters	1450 min-1	4 HP	10 bar	400 V - 50 Hz	128 kg
PTC 35-500-600-CAR-T	600 l/min	500 liters	1450 min-1	5.5 HP	11 bar	400 V - 50 Hz	210 kg
PTC 38-500-650-CAR-T	655 l/min	500 liters	900 min-1	5.5 HP	11 bar	400 V - 50 Hz	238 kg

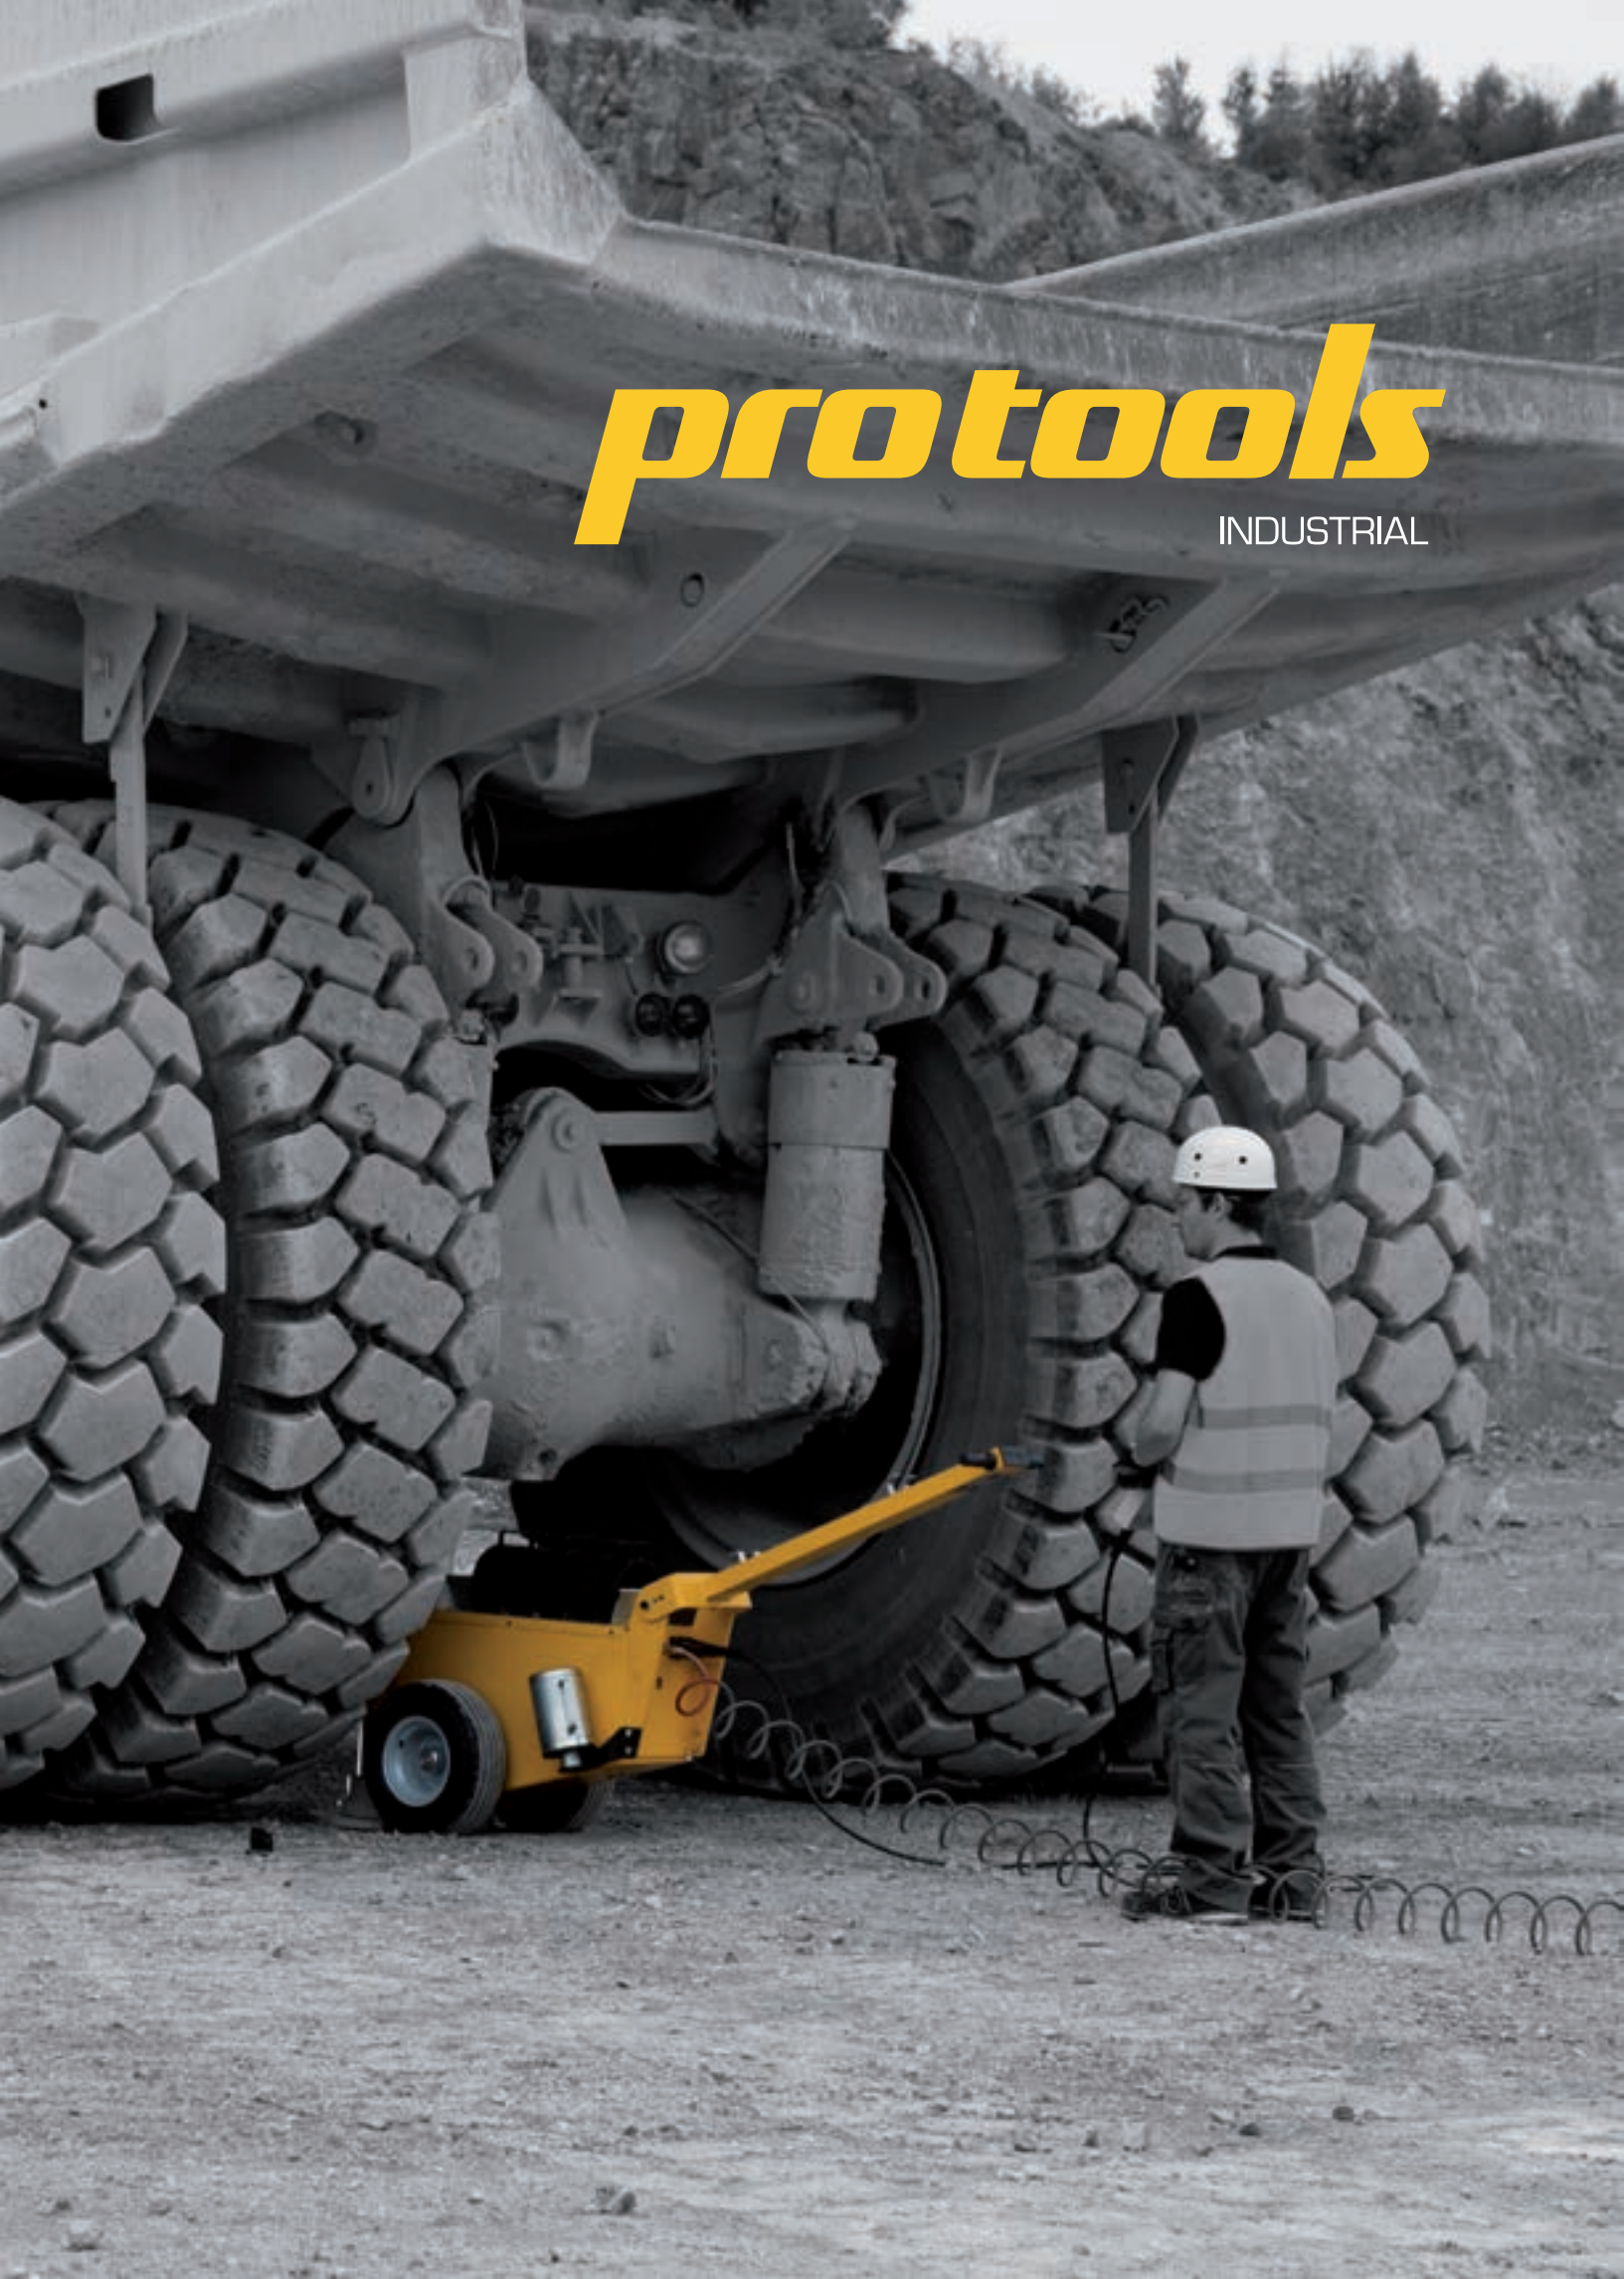


A black and white photograph of a large mining truck, likely a haul truck, at a construction or mining site. The truck's massive, treaded tires and heavy-duty suspension are prominent. A worker wearing a white hard hat and a high-visibility safety vest stands next to a yellow air hose reel, which is connected to the truck's air system. The background shows a rocky, excavated hillside.

pro tools


INDUSTRIAL

Mining Jacks

Air hydraulic jacks

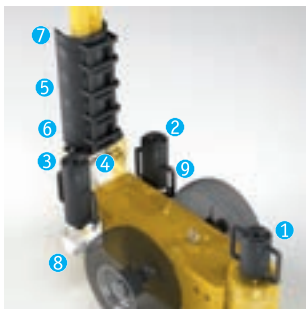

- 1 - A02432 Extension 150mm
- 2 - A02434 Extension 250mm
- 3 - A02436 Extension 300mm
- 4 - A02392 Safety Lock Holder
- 5 - A00835 Safety blocks H100 M/F 177mm
- 6 - A00837 Safety blocks H100 F/F 177mm
- 7 - A00839 Safety blocks H50 M/F 177mm
- 8 - A02399 Extension Holder R
- 9 - A02400 Extension Holder L

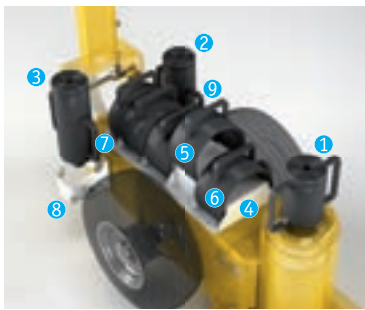

- 1 - A02432 Extension 150mm
- 2 - A02434 Extension 250mm
- 3 - A02436 Extension 300mm
- 4 - A00884 Safety block holder
- 5 - A00835 Safety blocks H100 M/F 177mm
- 6 - A00837 Safety blocks H100 F/F 177mm
- 7 - A00839 Safety blocks H50 M/F 177mm
- 8 - A02399 Extension Holder R
- 9 - A02400 Extension Holder L

PTJ M6022	60/30 t	2	220 mm	447 mm	8-12 bar	94 Kg	600 nl/min
PTJ M8031	80/50/25 t	3	341 mm	859 mm	8-12 bar	138 Kg	600 nl/min
PTJ M8042	80/50 t	2	420 mm	838 mm	8-12 bar	145 Kg	600 nl/min
PTJ M10040	100 t	1	400 mm	600 mm	8-12 bar	190 Kg	600 nl/min
PTJ M10072	100 t	1	725 mm	1170 mm	8-12 bar	324 Kg	600 nl/min
PTJ M15090	150 t	1	901 mm	1455 mm	8-12 bar	389 Kg	600 nl/min

Mining Jacks

Air hydraulic jacks



PTJM10040



PTJM10072



PTJM15090



- 1 - A02421 Extension 200mm
- 2 - A02422 Extension 250mm
- 3 - A02423 Extension 300mm
- 4 - A00884 Safety block holder
- 5 - A00835 Safety blocks H100 M/F 177mm
- 6 - A00837 Safety blocks H100 F/F 177mm
- 7 - A00839 Safety blocks H50 M/F 177mm
- 8 - A02397 Extension Holder R
- 9 - A02398 Extension Holder L



- 1 - A02421 Extension 200mm
- 2 - A02422 Extension 250mm
- 3 - A02423 Extension 300mm
- 4 - A00886 Safety block holder
- 5 - A00841 Safety blocks H100 M/F 177mm
- 6 - A00843 Safety blocks H100 F/F 177mm
- 7 - A00845 Safety blocks H50 M/F 177mm
- 8 - A02397 Extension Holder R
- 9 - A02398 Extension Holder L

	Remote control	Loading Block System	Safety Block Holder	Right Extension Holder	Left Extension Holder	Safety Block H100 (M-F)	Safety Block H100 (F-F)	Safety Block H50 (M-F)	Extension 10mm	Extension 70mm	Extension 120mm	Extension 150mm	Extension 200mm	Extension 250mm	Extension 300mm
PTJ M6022	A00452								A02354	A02410	A02406				
PTJ M8031	A00452	A00790	A00884	A02399	A02400	A00835	A00837	A00839				A02432		A02434	A02436
PTJ M8042	A00452	A00790	A00884	A02399	A02400	A00835	A00837	A00839				A02432		A02434	A02436
PTJ M10040	A00452	A00790	A00884	A02399	A02400	A00835	A00837	A00839				A02432		A02434	A02436
PTJ M10072		A00788	A00884	A02397	A02398	A00835	A00837	A00839					A02421	A02422	A02423
PTJ M15090		A00789	A00886	A02397	A02398	A00841	A00843	A00845					A02421	A02422	A02423

Impact Wrenches

Industrial Impact Wrenches



PTW246



PTW251



PTW320



PTW80TA1



PTW80TA1-6

							
PTW 246	1"	M18-M39	2796 Nm	6.3 bar	1/2" BSP	13 mm	8.24 Kg
PTW 251	1"	M18-M39	3038 Nm	6.3 bar	1/2" BSP	13 mm	9.10 Kg
PTW 320	1"	M18-M45	3728 Nm	6,3 bar	1/2" BSP	13 mm	10.85 Kg
PTW 362A	1"1/2	M24-M56	5933 Nm	6.3 bar	1/2" BSP	16 mm	14.90 Kg
PTW 362BGA	1"1/2	M24-M56	5933 Nm	6.3 bar	1/2" BSP	16 mm	14.52 Kg
PTW 635	2"1/2	M50-M110	26370 Nm	6.3 bar	1" BSP	25 mm	67 Kg
PTW 80TA1	1"	M18-M45	2983 Nm	6.3 bar	1/2" BSP	13 mm	6.8 Kg
PTW 80TA1-6	1"	M18-M45	2983 Nm	6.3 bar	1/2" BSP	13 mm	7.7 Kg

Impact Wrenches

Atex Range



PTW217ATEX



PTW251ATEX



PTW256BGATEX



PTW362BGATEX

								
PTW 217ATEX	3/4"	M14-M24	1600 Nm	320-907 Nm	6.3 bar	1/2" BSP	13 mm	8.11 Kg
PTW 251ATEX	1"	M18-M39	3038 Nm	686-1568 Nm	6.3 bar	1/2" BSP	13 mm	12.40 Kg
PTW 256BGATEX	1"	M18-M39	3185 Nm	588-1666 Nm	6.3 bar	1/2" BSP	13 mm	12.58 Kg
PTW 362BGATEX	1 1/2"	M24-M56	5297 Nm	1177-2943 Nm	6.3 bar	1/2" BSP	13 mm	18.70 Kg

Impact Wrenches

Hydraulic Impact Wrenches



	IMPACT WRENCH TECHNICAL DATA					POWER UNIT							
											HYDRAULIC	PNEUMATIC	WRENCH INCLUDED
PTW HYDROT	¾" - 1"	M30	3000 Nm	10 l./min	5.4 kg	60 kg	2.2 kw	220/400 trifase	335x600	1000	•		•
PTW HYDROS	¾" - 1"	M30	3000 Nm	10 l./min	5.4 kg	91.2 kg	2.2 kw	220/400 trifase	600x500	1900	•		•
PTW PNEUMATICS						53.80 kg	-	220/400 trifase	610x690	1935		•	

Compressors

Screw / Silent Compressors

ADDITIONAL CONFIGURATIONS
AVAILABLE ON DEMAND



PTCR20-2500



PTCE-10-300



PTC28-500-S-200



PTC12-24-250-S



Screw compressor

PTC R20-2500	2480 l/min	-	-	20 HP	8 bar	400/690/3 V	300 kg
PTC E10-300-1060	1060 l/min	300 liters	-	10 HP	8 bar	400/690/3 V	227 kg
PTC E10-300-970	970 l/min	300 liters	-	10 HP	10 bar	400/690/3 V	227 kg
PTC E10-300-850	850 l/min	300 liters	-	10 HP	13 bar	400/690/3 V	227 kg

Silent compressor

PTC 28-500-S-200	500 l/min	24+200 liters	1450 min-1	4 HP	11 bar	400 V - 50 Hz	160 kg
PTC 12-24-250-S	250 l/min	24 liters	1250 min-1	2 HP	10 bar	230 V - 50 Hz	68 kg

Compressor

Compressed air tanks



				Dimension cm		
	liters	bar	psi	Ø	H	Kg
PTV 24	24	11	159	24	67	13
PTV 50	50	11	159	30	98	18
PTV 100	100	11	159	37	115.5	28
PTV 200	200	11	159	44	152	51
PTV 270	270	11	159	49	166	63.5
PTV 500	500	11	159	60	206	125
PTV 720	720	11	159	80	200	195
PTV 900	900	11	159	80	208	220
PTV 1000	1000	12	174	80	225	235
PTV 2000	2000	12	174	110	250	330
PTV 3000	3000	12	174	120	330	560

PROTOOLS HIGH QUALITY GROUND PROTECTION, STACK PADS, STABILITY SOLUTION



GROUND PROTECTION

Protools outrigger pads are strong, rigid and easy equipment made of engineered thermoplastic material. These pads spread the weight over a larger surface offering better support while also protecting the surface.

Protools pads are:

Ecological, Easy to handle, Flexible, Water repellent
Nearly unbreakable, Anti-rust and anti-rot.



PROTOOLS STACK PADS

Protools stack pads are often used in combination with a larger outriggerpad on which those stack pads are piled up. Stack different pads in order to meet the requested height and enjoy the 2-sided antigrip finishing technology.



PROTOOLS STABILITY SOLUTION

Protools stability solutions are engineered to crib, block or stabilize the equipment, or vehicles. Our stability solutions are designed as a system of interlocking blocks. These blocks are composed of 2 sides with notches and 2 sides with a pyramid surface. This system allows you to crib any vehicle or tool with no worry about safety and stability.

Protools stability solution are:

Lightweight and easy to handle, Oil / Chemicals resistant, Skidproof



AIR LIFTING BAGS




High-pressure lifting bags are used for lifting the heaviest loads. They exert maximum force in a concentrated area, making them ideal when lifting rigid structures in tight places.

Their unique structure also allows use in load shifting, heavy truck or aircraft recovery and different moving situations. Our range starts from 3ton up to 100ton



Trolleys

Moving trolleys

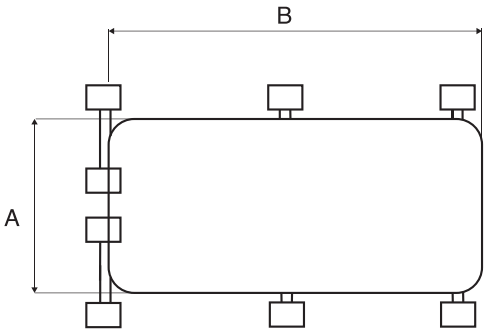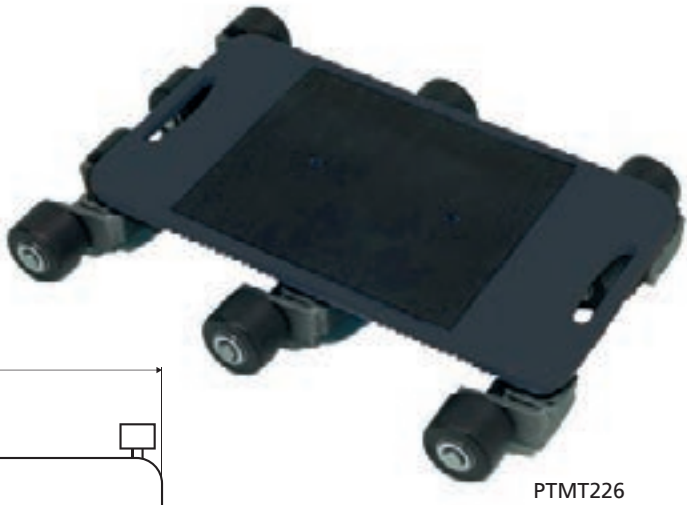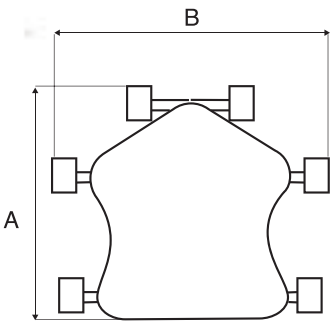


	Weels dimension mm.	Height of support plate mm.	Max load capacity ton.	Base dimension A+B mm.	
PTMT 225	80x90 h. 65	121	7,5	560x560	46 Kg
PTMT 226	80x90 h. 65	121	9	390x700	59 Kg

Trolleys

Moving trolleys




PTMT300

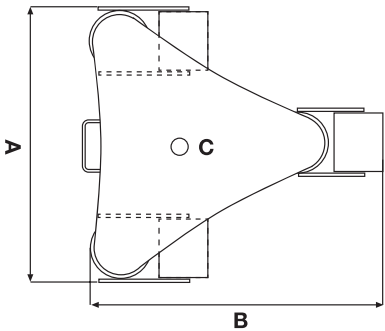

PTMT301



PTMT302

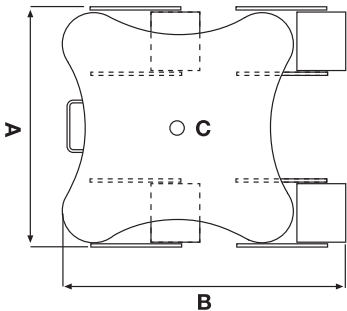

	Max load capacity ton.	Dimension mm.			
		A	B	C	
PTMT 300	3	380	400	22	19 Kg
PTMT 301	4	350	440	22	30 Kg
PTMT 302	6	380	470	22	33 Kg

Notes

[illegible]





protools

Protools is a brand by

AGAPART Srl

Via Edison, 18 - 42049 S. Ilario d'Enza (RE) - ITALY

Ph +39 0522 679560

info@garageprotools.com

www.garageprotools.com

www.industrialprotools.com